



Specification

Modular vinyl floorcovering, with glass fibre reinforcement. Topclean XP™ polyurethane reinforcement.
In plank and tile form, with bevelled edges.
Product standard: ISO 10582 - EN 649.


| CERTIFICATION & CLASSIFICATION | STANDARDS | iD Inspiration 55 | iD Inspiration 70 |
|--------------------------------|--------------------|---|---|
| Type of floor covering | ISO 10582 - EN 649 | Compact Resilient Floorcovering | Compact Resilient Floorcovering |
| CE certification | EN 14041 | Yes | Yes |
| Classification | ISO 10874 - EN 685 | Residential: 23 Commercial: 33 Industrial: 42 | Residential: 23 Commercial: 34 Industrial: 43 |

| TECHNICAL CHARACTERISTICS | STANDARDS | iD Inspiration 55 | iD Inspiration 70 |
|---------------------------|-----------------------------|--|--|
| Total thickness | ISO 24346 - EN 428 | 2.5 mm | 2.5 mm |
| Wear layer thickness | ISO 24340 - EN 429 | 0.55 mm | 0.70 mm |
| Surface treatment (PUR) | | Yes | Yes |
| Sanitized® | | Yes | Yes |
| Bevelled edges | | Yes | Yes |
| Total weight | ISO 23997 - EN 430 | 3.950 g/m ² | 3.950 g/m ² |
| Abrasion group | EN 660-2 | Group T: ≤ 2.00 mm ³ | Group T: ≤ 2.00 mm ³ |
| Form of delivery | ISO 24342 - EN 427 | | |
| | Planks | 16.66 x 100 cm, 24 planks/box = 4 m ² 20 x 122 cm, 16 planks/box = 3.90 m ² 25 x 122 cm, 12 planks/box = 3.66 m ² 25 x 150 cm, 10 planks/box = 3.75 m ² | 16.66 x 100 cm, 24 planks/box = 4 m ² 20 x 122 cm, 16 planks/box = 3.90 m ² 25 x 122 cm, 12 planks/box = 3.66 m ² 25 x 150 cm, 10 planks/box = 3.75 m ² |
| | ISO 24342 - EN 427 Tiles | 50 x 50 cm, 16 tiles/box = 4 m ² 61 x 61 cm, 10 tiles/box = 3.72 m ² 30.5 x 61 cm, 20 tiles/box = 3.72 m ² 61 x 91,5 cm, 6 tiles/box = 3,35 m ² | 50 x 50 cm, 16 tiles/box = 4 m ² 61 x 61 cm, 10 tiles/box = 3.72 m ² 30.5 x 61 cm, 20 tiles/box = 3.72 m ² 61 x 91,5 cm, 6 tiles/box = 3,35 m ² |

| TECHNICAL PERFORMANCES | STANDARDS | iD Inspiration 55 | iD Inspiration 70 |
|-----------------------------------|-----------------------|--|--|
| Dimensional stability | ISO 23999 - EN 434 | ≤ 0.10 % | ≤ 0.10 % |
| Reaction to fire | EN 13501-1 | B _{fl} s1 over concrete and wood substrate | B _{fl} s1 over concrete and wood substrate |
| Residual indentation | ISO 24343-1 - EN 433 | ≤ 0.05 mm | ≤ 0.05 mm |
| Furniture leg | EN 424 | No damage | No damage |
| Castor chair | ISO 4918 - EN 425 | No damage | No damage |
| Curl resultant to heat | ISO 23999 - EN 434 | ≤ 2 mm | ≤ 2 mm |
| Underfloor heating | | Suitable - max. 27°C | Suitable - max. 27°C |
| Thermal resistance | EN 12524 | 0.03 m ² K/W | 0.03 m ² K/W |
| Impact sound reduction | EN 717-2 | ΔL _w = 2 dB | ΔL _w = 2 dB |
| Reduction of in room impact noise | NF EN ISO 31-074 | Class C (L _{n,e,w} < 85dB) | Class C (L _{n,e,w} < 85dB) |
| Light fastness | EN ISO 105-B02 | ≥ 6 | ≥ 6 |
| Resistance to chemicals | EN 423 | High resistance | High resistance |
| Slip resistance | EN 13893 DIN 51130 | μ ≥ 0,30 R9 | μ ≥ 0,30 R9 |
| Electrical properties | EN 1815 EN 1081 | ≤ 2kV on concrete > 10 ⁹ Ω | ≤ 2kV on concrete > 10 ⁹ Ω |
| Adhesion wear layer | EN 431 | ≥ 50N / 50mm | ≥ 50N / 50mm |
| Colours | | Woods: 60 Stone, graphic and material effects: 42 | Woods: 60 Stone, graphic and material effects: 42 |

The above information is subject to modification for the benefit of further improvement (07/12).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

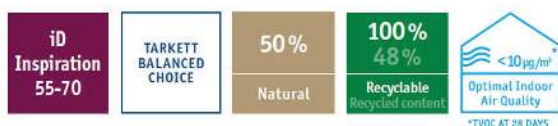

Manufactured by:
Tarkett GmbH
54329 Konz
GERMANY

ISO 10582 - EN 649
iD Inspiration 55-70

According to European Classification ISO 10874 - EN 685

