

PREFACE Function Plus™



Adapt / Segment

Construction	Tufted, Textured Loop Pile
Face Fibre	Solution Dyed 100% Nylon
Soil Release	StainSmart® for soil release, liquid repellence - selected colours only (on light colours LRV >20)
Finished Face Weight	445 g/m ²
Gauge	47.2 / 10 cm
Rows	41.3 / 10 cm
Tuft Density	195 118/m ²
Finished Pile Height	2.3 mm
Standard Backing	Function Plus™ Polymer modified bitumen hard back
Nominal Total Thickness	5.1 mm
Tile Size	50 cm x 50 cm
Nominal Total Weight	3700 g/m ²
Tiles per Box	22 (5.5m ²)

PERFORMANCE

Flammability (Euroclassification EN13501:1-2018)	Class Bfl - s1
Flammability (Radiant Panel ASTM-E-648)	Class 1
Flammability (Hot Metal Nut BS4790)	Low Radius of Char
Use Classification (EN 1307)	Class 33 Heavy Commercial Use
Castor Chair (BS EN 985:2001)	Class A - Intensive use (r value ≥ 2.4)
Static Electricity (ISO 6356)	Pass ≤ 2.0 KV Permanent Conductive Fibre
Impact Sound (ISO 10140-3)	22 dB
Sound Absorption (ISO354)	0.15 Class E (estimated)
Alpha s values	Est.-125Hz 0.00, 250Hz 0.00, 500Hz 0.05, 1000Hz 0.15, 2000Hz 0.35, 4000Hz 0.40

ENVIRONMENTAL

55% recycled content by total product weight
 Manufactured in ISO14001 certified location using renewable sources

WARRANTIES


10 year wear warranty
 Lifetime Antistatic guarantee
 Latent Defects guarantee

*StainSmart® Applied to the following colours only

Granite, Mist

CERTIFICATIONS

www.millikenfloors.com/gb/tech

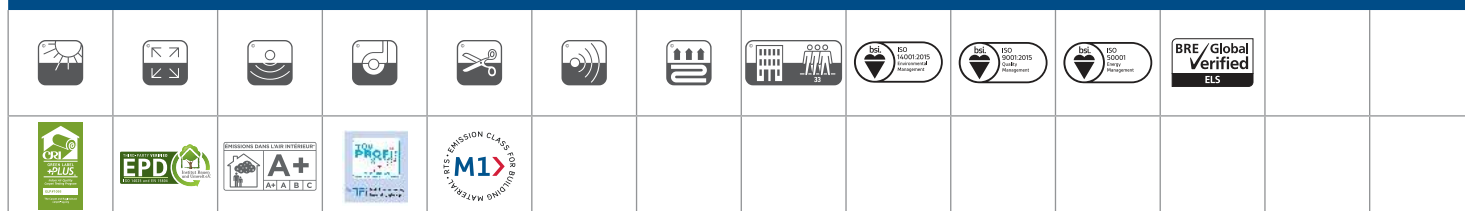

INSTALLATION



Monolithic

CE / UKCA

